

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number  
**WO 2005/002004 A2**

(51) International Patent Classification<sup>7</sup>: **H01S**

(21) International Application Number:  
PCT/IL2004/000576

(22) International Filing Date: 29 June 2004 (29.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/483,536 30 June 2003 (30.06.2003) US

(71) Applicant and  
(72) Inventor: ZIMMERMANN, Micha [IL/IL]; 6 Hatzofim  
Street, 34352 Haifa (IL).

(74) Agents: SANFORD T. COLB & CO. et al.; P.O. Box  
2273, 76122 Rehovot (IL).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: MICRO-OPTIC ALIGNMENT SYSTEM

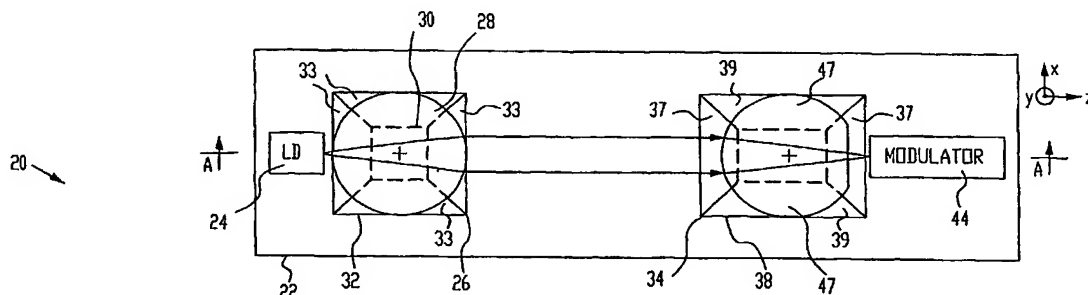

(57) Abstract: Optical alignment apparatus, consisting of an optical element (28) having a curved surface (29), and an optical bench (22), including a mounting surface (21) for mounting of an optical component (24, 44) thereon. The optical bench has an opening (26) formed in the mounting surface, the opening having a size and shape suitable to engage the curved surface of the optical element so as to permit alignment of the optical element with the optical component by relative rotation of the optical element within the opening while the curved surface is engaged by the opening.

WO 2005/002004 A2